



# VERSALUX-G

[1000 WATT MAX.]

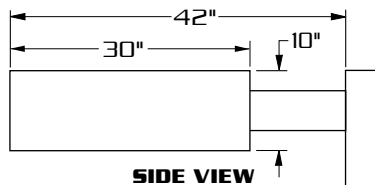


SIDE VIEW

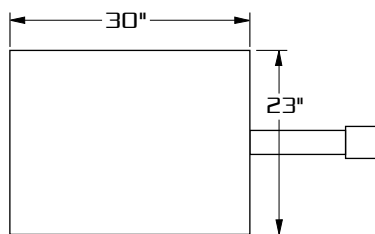

TOP VIEW

E.P.A.= 3.0

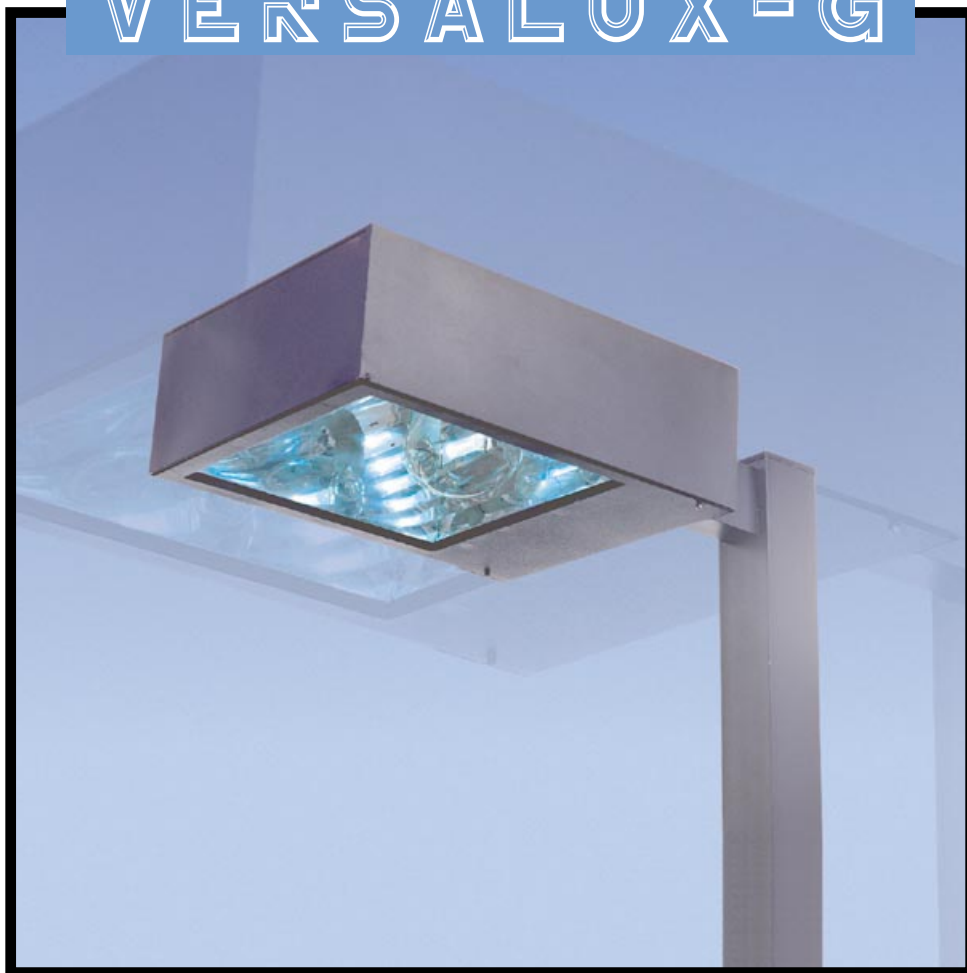

WM



1



2-180



2-90



3-90



3-120



4-90

## SPECIFICATIONS

**HOUSING:** ONE PIECE HEAVY GAUGE DIE FORMED ALUMINUM CONSTRUCTION CONTINUOUSLY SEAM WELDED. ELECTRICAL COMPONENTS MOUNTED IN SEPARATE BALLAST COMPARTMENT.

**LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. TWO CAPTIVE THUMB SCREWS DISENGAGE LENS ASSEMBLY FROM HOUSING WITHOUT THE USE OF TOOLS.

**OPTICS:** SEMI SPECULAR SEGMENTED REFLECTOR COMBINES WITH 3/16" CLEAR TEMPERED LENS TO PRODUCE A FORWARD THROW (TYPE IV) LIGHT DISTRIBUTION.

**GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.

**LAMP HOLDER:** MOGUL BASE PORCELAIN.

**LAMP:** (BY OTHERS)

**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE.


**ARM:** 3"X5"X12" LONG HEAVY WALL EXTRUDED ALUMINUM. ARM IS SECURED TO HOUSING AND TO POLE WITH STAINLESS STEEL RODS.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.





660 WEST AVENUE O, PALMDALE, CA. 93551  
(661) 233-2000  
FAX NO. (661) 233-2001  
www.usaltg.com


**TYPICAL SQUARE POLE TEMPLATE**

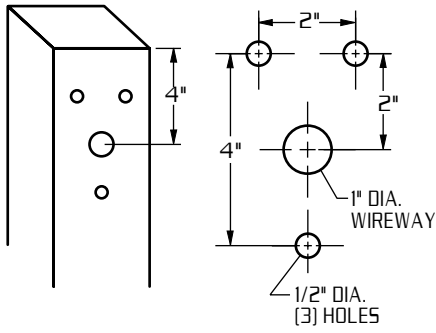

**WALL MOUNT**




**LAMP SIZE:  
400 - 1000 WATT**

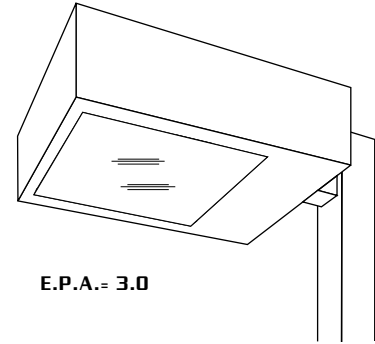

**E.P.A. = 3.0**

**TYPICAL ROUND POLE TEMPLATE**

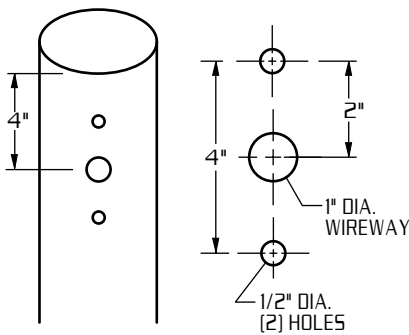


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**RECTILINEAR HEAVY GAUGE ALUMINUM HOUSING.**

**THREE OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS LENS.**

**TOOLESS LUMINAIRE ACCESS.**

**WALL PLATE**



**ORDERING INFORMATION**

MODEL NO. : <b>VRS-G</b>	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
<b>MODEL NO. :</b> <b>VRS-G</b>	<b>OPTICS</b>	<b>LAMP</b>	<b>MOUNTING</b>	<b>FINISH</b>	<b>OPTIONS</b>
<b>V</b> <b>R</b> <b>S</b> <b>-</b> <b>G</b>	<input type="checkbox"/> TYPE III <b>III</b> ..... <input type="checkbox"/> TYPE IV (FORWARD THROW) <b>IV</b> ..... <input type="checkbox"/> TYPE V <b>V</b> .....	<input type="checkbox"/> <b>1000</b> <input type="checkbox"/> <b>HPS</b> <input type="checkbox"/> <b>120</b> <input type="checkbox"/> <b>400</b> <input type="checkbox"/> <b>MH</b> <input type="checkbox"/> <b>208</b>  <input type="checkbox"/> <b>240</b> <input type="checkbox"/> <b>277</b>  <input type="checkbox"/> <b>480</b> <input type="checkbox"/> <b>MT</b>	<b>ARM MOUNT</b> <input type="checkbox"/> <b>1</b> .....  <b>STREET LIGHTING ARM MOUNT</b> <input type="checkbox"/> <b>ST23</b> ..... (TO FIT OVER 2 3/8" O.D. ARM)  <b>ADJUSTABLE KNUCKLE</b> <input type="checkbox"/> <b>NKLE23</b> ..... (TO FIT OVER 2 3/8" O.D.) <input type="checkbox"/> <b>NKLE27</b> ..... (TO FIT OVER 2 7/8" O.D.)  <b>WALL MOUNT</b> <input type="checkbox"/> <b>WM</b> .....  SEE ACCESSORIES SECTION FOR ST23 AND NKLE DETAILS	<input type="checkbox"/> DARK BRONZE <b>DBM</b> <input type="checkbox"/> MEDIUM BRONZE <b>MBM</b> <input type="checkbox"/> BLACK <b>BKM</b> <input type="checkbox"/> WHITE <b>WTM</b> <input type="checkbox"/> SILVER <b>SLM</b>  <b>OPTION:</b> <input type="checkbox"/> ANODIZED <b>AZ</b> ANODIZED HOUSING MUST HAVE PAINT FINISH COAT EXAMPLE: <b>AZDBM</b>  SEE PAGE 3 FOR ADDITIONAL COLORS	<input type="checkbox"/> HOUSE SIDE SHIELD ..... <b>HS</b> <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) ..... <b>PC+V</b> <input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) ..... <b>TPC+V</b> <input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY ..... <b>TPR</b> <input type="checkbox"/> SINGLE FUSE (120V., 277V) ..... <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... <b>DF</b>

