




DSA



DSA1
[175 WATT MAX.]



DSA2
[100 WATT MAX.]

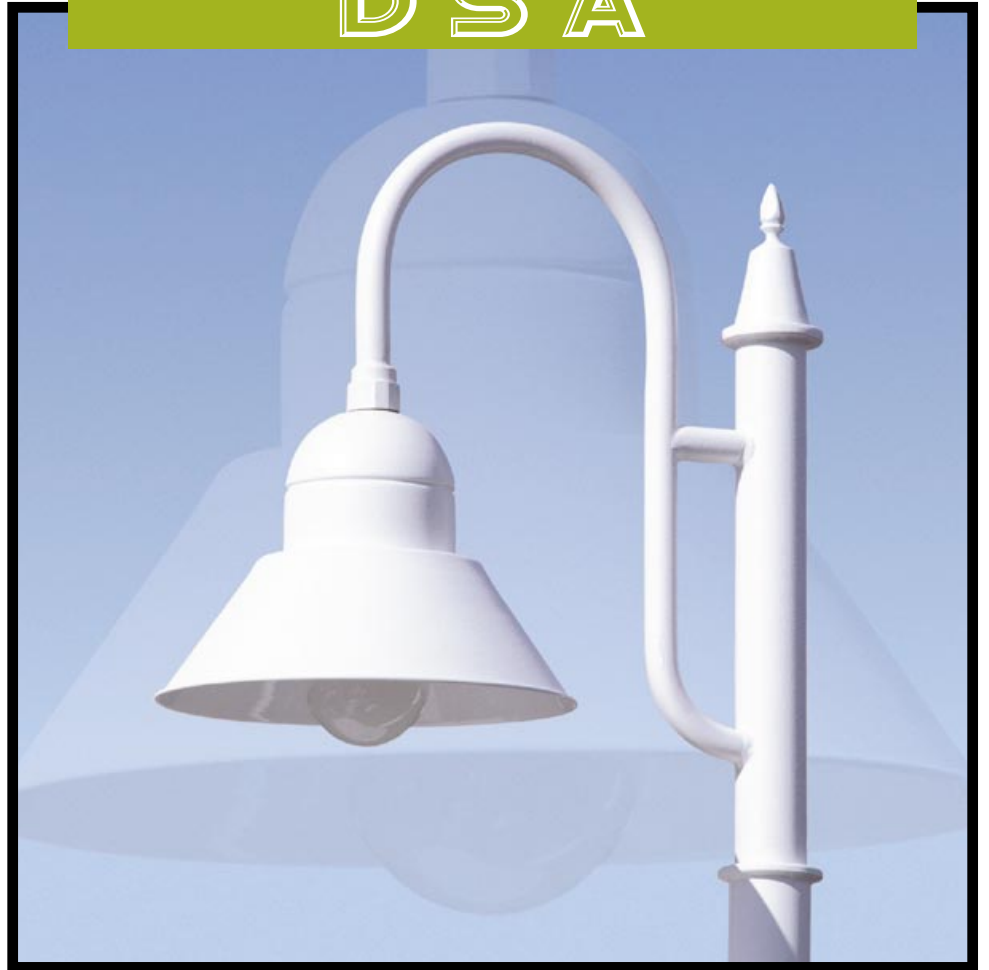

E.P.A. **DSA1-** 0.83
DSA2- 0.65



WM



1



2-180



2-90



3-90



3-120



4-90

SPECIFICATIONS

HOUSING: ONE PIECE HEAVY WALL ALUMINUM CONSTRUCTION WITH REMOVABLE BALLAST TRAY FOR EASY BALLAST ACCESS.

REFLECTOR: HEAVY WALL ALUMINUM CONSTRUCTION. INSIDE OF REFLECTOR FINISHED IN HIGH GLOSS WHITE ENAMEL FOR MAXIMUM REFLECTANCE.

OPTICS: CLEAR PRISMATIC TEMPERED GLASS DIFFUSER.
OPTION: OPAL GLASS DIFFUSER

LAMP HOLDER: MEDIUM BASE PORCELAIN.

LAMP: (BY OTHERS)

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.


FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



660 WEST AVENUE O, PALMDALE, CA. 93551
(661) 233-2000
FAX NO. (661) 233-2001
www.usaltg.com

B1-1


MOUNTING STYLES

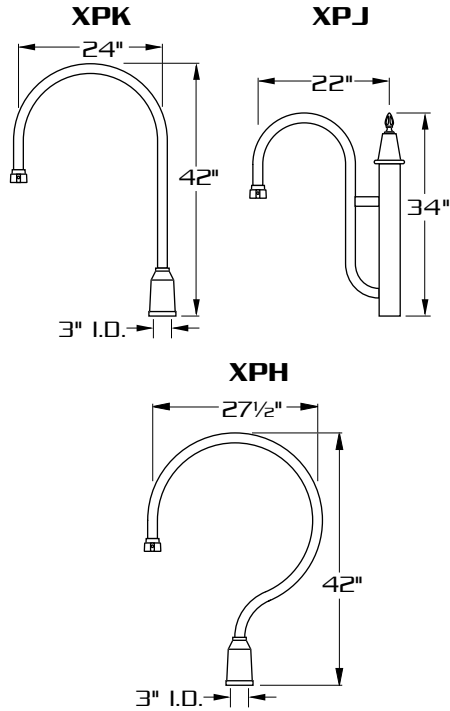

AVAILABLE FOR MOUNTING 1 ONLY

ARMS ARE HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION. FOR ADDITIONAL ARM OPTIONS SEE ARM SECTION.


WALL MOUNT



LUM.	A	B	C
DSA1	14"	20"	17"
DSA2	13"	14"	15 1/2"


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE



**LAMP SIZE:
50 - 175 WATT**

E.P.A.= 0.83



DSA1
(175 WATT MAX.)

E.P.A.= 0.65



DSA2
(100 WATT MAX.)

ALL ALUMINUM CONSTRUCTION.

INTEGRAL, SELF CONTAINED BALLAST COMPARTMENT.

THREE MOUNTING STYLES.

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
DSA					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
D S A	<p>STANDARD:</p> <input type="checkbox"/> CLEAR PRISMATIC TEMPERED GLASS CPG	<p>WATTAGE TYPE VOLTAGE</p> <input type="checkbox"/> 175 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 150 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 100 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 75 <input type="checkbox"/> 277 <input type="checkbox"/> 70 <input type="checkbox"/> 480 <input type="checkbox"/> 50 <input type="checkbox"/> MT <p>MEDIUM BASE LAMP ONLY</p> <p>DSA2- 100 W. MAX.</p>	<input type="checkbox"/> XPK <input type="checkbox"/> XPJ <input type="checkbox"/> XPH <input type="checkbox"/> WM ● <input type="checkbox"/> 1 ●	<input type="checkbox"/> DARK BRONZE DBM <input type="checkbox"/> MEDIUM BRONZE MBM <input type="checkbox"/> BLACK BKM <input type="checkbox"/> WHITE WTM <input type="checkbox"/> SILVER SLM <p>OPTION:</p> <input type="checkbox"/> ANODIZED AZ <small>ANODIZED HOUSING MUST HAVE PAINT FINISH COAT EXAMPLE: AZDBM</small>	<input type="checkbox"/> 3/8" IPS STEM MOUNT AND SWIVEL CANOPY (4'-0" MAX.) SM <input type="checkbox"/> CHAIN MOUNTED (4'-0" MAX.) CM <input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180° <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V <input type="checkbox"/> SINGLE FUSE (120V., 277V) SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF
	<p>OPTIONS:</p> <input type="checkbox"/> OPAL GLASS DIFFUSER WGD <small>(ANNEALED & HEAT RESISTANT)</small>		<p>SEE ARM SECTION FOR ADDITIONAL ARMS</p>	<p>SEE PAGE 3 FOR ADDITIONAL COLORS</p>	

