



DSAD1

[175 WATT MAX.]

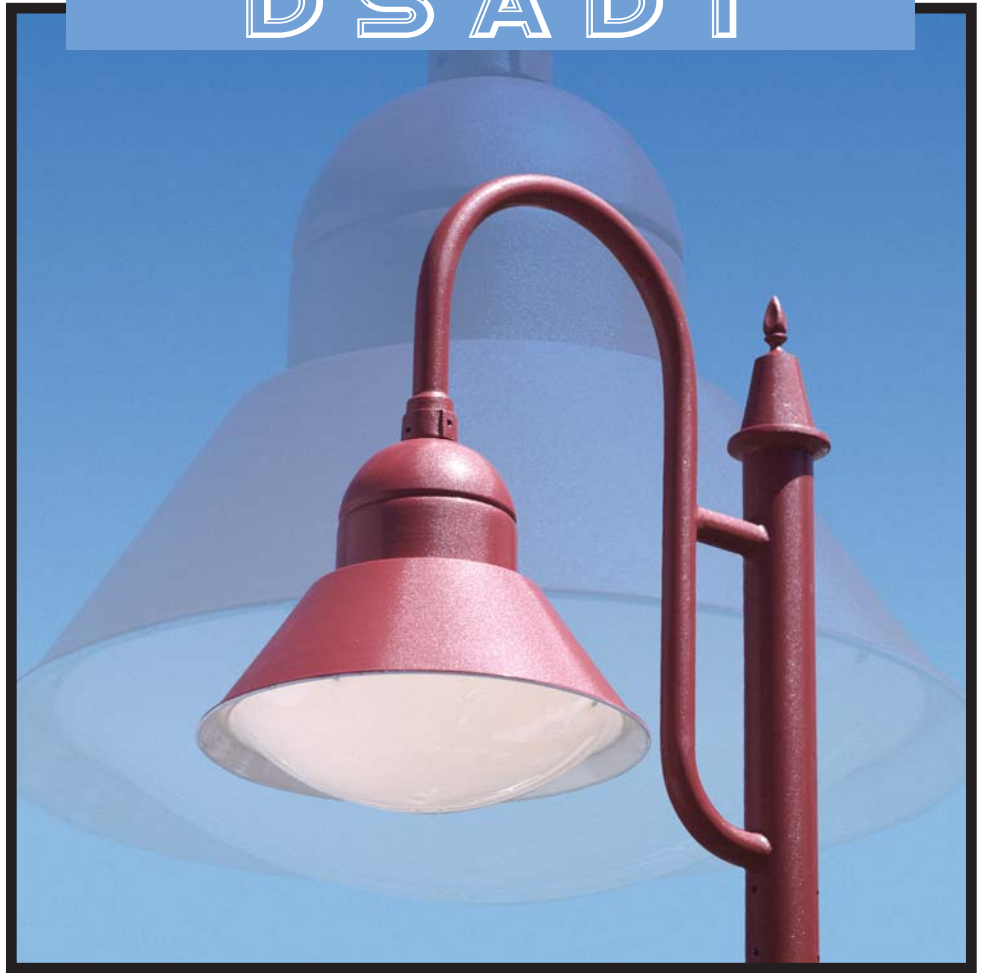

E.P.A. = 0.80



WM



1



2-180



2-90



3-90



3-120



4-90

SPECIFICATIONS

HOUSING: HEAVY WALL ALUMINUM CONSTRUCTION WITH REMOVABLE BALLAST TRAY FOR EASY BALLAST ACCESS.

REFLECTOR: HEAVY WALL ALUMINUM CONSTRUCTION. INSIDE OF REFLECTOR FINISHED WITH HIGH GLOSS WHITE ENAMEL.

OPTICS: DISHED OPAL ACRYLIC DIFFUSER. SYMMETRIC LIGHT DISTRIBUTION.

LAMP HOLDER: MEDIUM OR MOGUL BASE PORCELAIN.

LAMP: (BY OTHERS)

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.


FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



660 WEST AVENUE O, PALMDALE, CA. 93551
(661) 233-2000
FAX NO. (661) 233-2001
www.usaltg.com

B1-3
REV. 10 / 03


MOUNTING STYLES

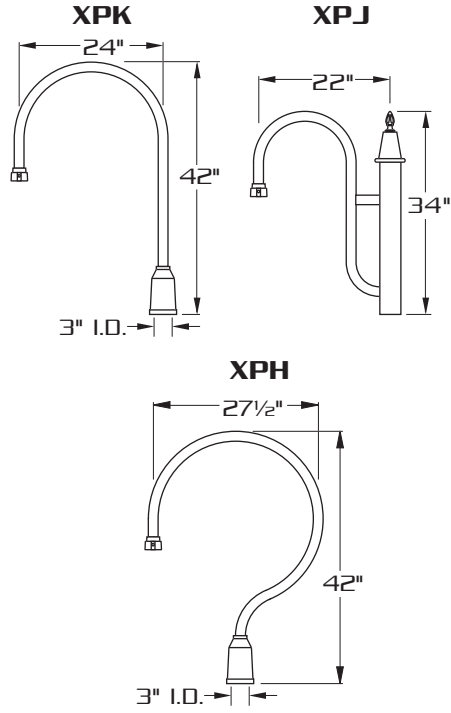

AVAILABLE FOR MOUNTING 1 ONLY


ARMS ARE HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION. FOR ADDITIONAL ARM OPTIONS SEE ARM SECTION.

WALL MOUNT



EXTRUDED AND CAST ALUMINUM CONSTRUCTION. ARM FURNISHED WITH BUILT IN GASKETED HAND HOLE FOR FIXTURE WIRE/SUPPLY WIRE CONNECTION.

WALL PLATE



**LAMP SIZE:
50 - 175 WATT**

E.P.A. = 0.80



ALL ALUMINUM CONSTRUCTION.
INTEGRAL, SELF CONTAINED BALLAST COMPARTMENT.
THREE MOUNTING STYLES.

ORDERING INFORMATION

| MODEL NO. : DSAD1 | OPTICS | WATTAGE TYPE VOLTAGE | MOUNTING | FINISH | OPTIONS |
|----------------------------------|--|--|---|---|---|
| D S A D 1 | STANDARD: | WATTAGE TYPE VOLTAGE | <input type="checkbox"/> XPK <input type="checkbox"/> XPJ | <input type="checkbox"/> DARK BRONZE DBM | <input type="checkbox"/> 3/8" IPS STEM MOUNT AND SWIVEL CANOPY (4'-0" MAX.) SM |
| | <input type="checkbox"/> OPAL ACRYLIC WA | <input type="checkbox"/> 175 <input type="checkbox"/> HPS <input type="checkbox"/> 120 | <input type="checkbox"/> XPH | <input type="checkbox"/> MEDIUM BRONZE MBM | <input type="checkbox"/> CHAIN MOUNTED (4'-0" MAX.) CM |
| | OPTIONS: | <input type="checkbox"/> 150 <input type="checkbox"/> MH <input type="checkbox"/> 208 | <input type="checkbox"/> WM | <input type="checkbox"/> BLACK BKM | <input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180° |
| | <input type="checkbox"/> CLEAR ACRYLIC CA | <input type="checkbox"/> 100 <input type="checkbox"/> MV <input type="checkbox"/> 240 | <input type="checkbox"/> 1 | <input type="checkbox"/> WHITE WTM | <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V |
| | <input type="checkbox"/> OPAL POLYCARBONATE WP | <input type="checkbox"/> 75 <input type="checkbox"/> 277 | | <input type="checkbox"/> SILVER SLM | <input type="checkbox"/> SINGLE FUSE (120V., 277V) SF |
| | <input type="checkbox"/> CLEAR POLYCARBONATE CP | <input type="checkbox"/> 70 <input type="checkbox"/> 480 | | OPTION: | <input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF |
| | | <input type="checkbox"/> 50 <input type="checkbox"/> MT | | <input type="checkbox"/> ANODIZED AZ | |
| | | | SEE ARM SECTION FOR ADDITIONAL ARMS | ANODIZED HOUSING MUST HAVE PAINT FINISH COAT EXAMPLE: AZDBM | |
| | | | | SEE PAGE 3 FOR ADDITIONAL COLORS | |



660 WEST AVENUE O, PALMDALE, CA. 93551
(661) 233-2000
FAX NO. (661) 233-2001
www.usaltg.com