



# DSAP




**DSAP25**  
[250 WATT MAX.]



**DSAP1**  
[175 WATT MAX.]

E.P.A. **DSAP25** = 1.23  
**DSAP1** = 0.77

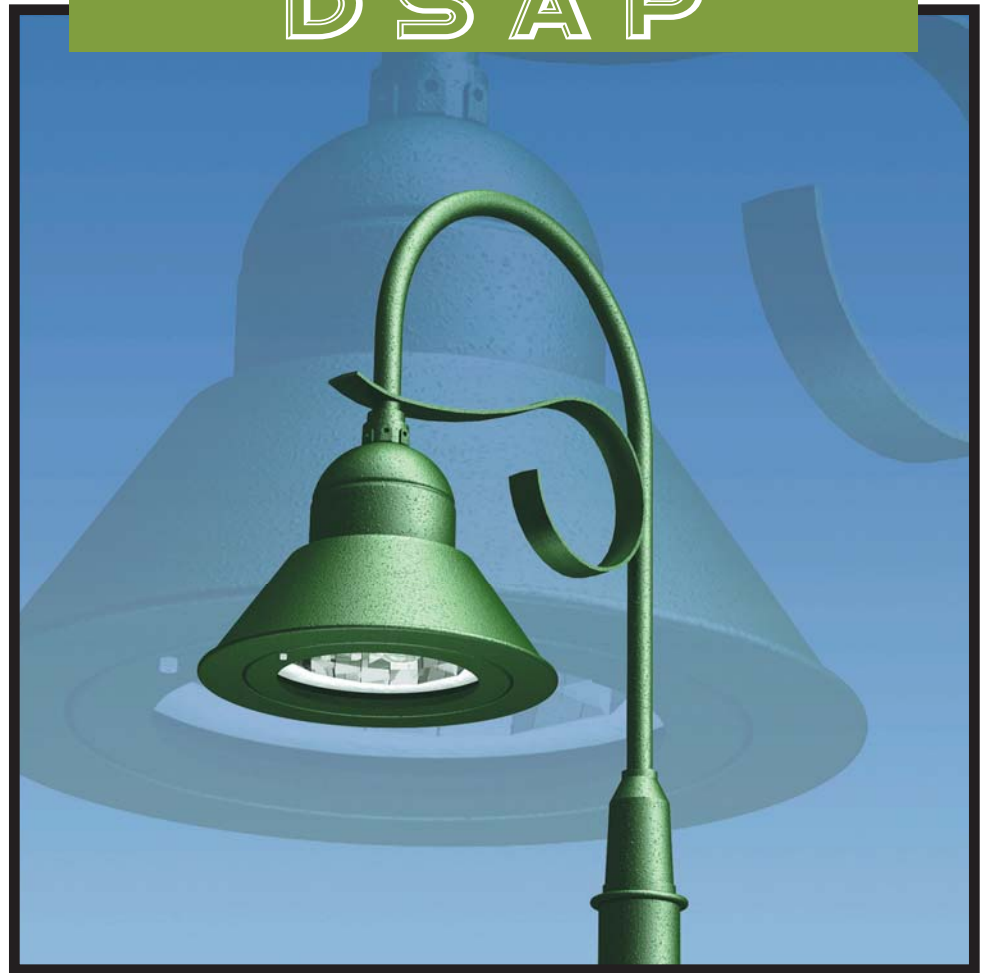

WM



1



2-180



2-90



3-90



3-120



4-90

## SPECIFICATIONS

**HOUSING:** ONE PIECE HEAVY WALL ALUMINUM CONSTRUCTION WITH REMOVABLE BALLAST TRAY FOR EASY BALLAST ACCESS.

**LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. CAPTIVE THUMB SCREW DISENGAGES LENS ASSEMBLY AND ACTIVATES ACCUHINGE™ TO ALLOW LENS ASSEMBLY TO HINGE AWAY FROM HOUSING FOR LUMINAIRE ACCESS WITHOUT THE USE OF TOOLS.

**OPTICS:** COMPUTER DESIGNED ONE PIECE SPECULAR SEGMENTED SIDE REFLECTORS COMBINE WITH AN AUXILIARY SPECULAR TOP REFLECTOR TO PRODUCE A HIGHLY EFFICIENT, SHARP CUTOFF. OPTICAL ASSEMBLY IS ROTATABLE IN 90° INCREMENTS.

**GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING WORKS IN COMBINATION WITH ACCUHINGE™ TO PRESSURE SEAL OPTICAL CHAMBER.

**LAMP HOLDER:** MEDIUM OR MOGUL BASE PORCELAIN. LAMPHOLDER EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.



**LAMP:** (BY OTHERS)

**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




**MOUNTING STYLES**

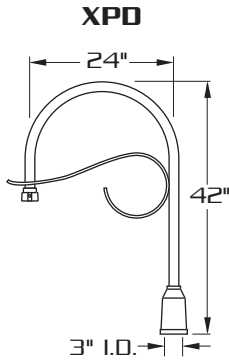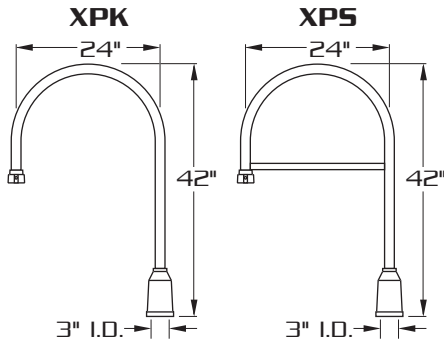

ARMS ARE HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION. FOR ADDITIONAL ARM OPTIONS SEE ARM SECTION.


**WALL MOUNT**



LUM.	A	B	C
DSAP1	14"	20"	14"
DSAP25	18"	25"	18 1/2"


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**




**LAMP SIZE:  
50 - 250 WATT**

E.P.A. = 1.23



**DSAP25**  
(250 WATT MAX.)

E.P.A. = 0.77



**DSAP 1**  
(175 WATT MAX.)

FOUR LIGHT DISTRIBUTIONS AVAILABLE.

OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS LENS.

REFLECTOR IS FIELD ROTATABLE.

**ORDERING INFORMATION**

MODEL NO. : DSAP	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
<b>MODEL NO. :</b> <b>DSAP</b>	<b>OPTICS</b>	<b>LAMP</b>	<b>MOUNTING</b>	<b>FINISH</b>	<b>OPTIONS</b>
<b>D S A P</b>	<b>HORIZONTAL LAMP REFLECTORS</b> <input type="checkbox"/> TYPE II <b>HR-II</b> ..... (segmented) <input type="checkbox"/> TYPE III <b>HR-III</b> ..... (segmented) <input type="checkbox"/> TYPE IV (FORWARD THROW) <b>HR-IV</b> ..... (segmented) <input type="checkbox"/> TYPE V <b>HR-V-SQ</b> ..... (segmented)	<input type="checkbox"/> 250 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 175 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 150 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 100 <input type="checkbox"/> 277 <input type="checkbox"/> 75 <input type="checkbox"/> 480 <input type="checkbox"/> 70 <input type="checkbox"/> MT <input type="checkbox"/> 50	<input type="checkbox"/> XPK <input type="checkbox"/> XPS <input type="checkbox"/> XPD <input type="checkbox"/> WM ..... <input type="checkbox"/> 1 .....	<input type="checkbox"/> DARK BRONZE <b>DBM</b> <input type="checkbox"/> MEDIUM BRONZE <b>MBM</b> <input type="checkbox"/> BLACK <b>BKM</b> <input type="checkbox"/> WHITE <b>WTM</b> <input type="checkbox"/> SILVER <b>SLM</b>	<input type="checkbox"/> CONVEX GLASS..... <b>DG</b> <input type="checkbox"/> CLEAR CONVEX POLYCARBONATE DIFFUSER..... <b>LEX</b> <input type="checkbox"/> 3/4" IPS STEM MOUNT AND SWIVEL CANOPY (4'-0" MAX.)..... <b>SM</b> <input type="checkbox"/> CHAIN MOUNTED (4'-0" MAX.)..... <b>CM</b> <input type="checkbox"/> HOUSE SIDE SHIELD..... <b>HS</b> <input type="checkbox"/> QUARTZ RESTRIKE..... <b>QTZ</b> <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V)..... <b>PC+V</b> <input type="checkbox"/> SINGLE FUSE (120V., 277V)..... <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V., 240V)..... <b>DF</b>
	<b>VERTICAL LAMP REFLECTORS</b> <input type="checkbox"/> ASYMMETRIC <b>VR-ASY</b> ..... (segmented) <input type="checkbox"/> TYPE V <b>VR-V-SQ</b> ..... (segmented) VERTICAL LAMP REFLECTOR REQUIRES CONVEX GLASS	<b>DSAP25</b> USE MOGUL BASE LAMPS  <b>DSAP1</b> USE MEDIUM BASE LAMPS	SEE ARM SECTION FOR ADDITIONAL ARMS	SEE PAGE 3 FOR ADDITIONAL COLORS	



660 WEST AVENUE O, PALMDALE, CA. 93551

(661) 233-2000

FAX NO. (661) 233-2001

www.usaltg.com