



# DSCP



**DSCP25**  
[250 WATT MAX.]



**DSCP1**  
[175 WATT MAX.]

E.P.A. **DSCP25** = 1.10  
**DSCP1** = 0.63



WM



1



2-180



2-90



3-90



3-120





4-90

## SPECIFICATIONS

- HOUSING:** ONE PIECE HEAVY WALL ALUMINUM CONSTRUCTION WITH REMOVABLE BALLAST TRAY FOR EASY BALLAST ACCESS.
- LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. CAPTIVE THUMB SCREW DISENGAGES LENS ASSEMBLY AND ACTIVATES ACCUHINGE™ TO ALLOW LENS ASSEMBLY TO HINGE AWAY FROM HOUSING FOR LUMINAIRE ACCESS WITHOUT THE USE OF TOOLS.
- OPTICS:** COMPUTER DESIGNED ONE PIECE SPECULAR SEGMENTED SIDE REFLECTORS COMBINE WITH AN AUXILIARY SPECULAR TOP REFLECTOR TO PRODUCE A HIGHLY EFFICIENT, SHARP CUTOFF. OPTICAL ASSEMBLY IS ROTATABLE IN 90° INCREMENTS.
- GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING WORKS IN COMBINATION WITH ACCUHINGE™ TO PRESSURE SEAL OPTICAL CHAMBER.
- LAMP HOLDER:** MEDIUM OR MOGUL BASE PORCELAIN. LAMPHOLDER EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.
- LAMP:** [BY OTHERS]
- BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.
- FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




**MOUNTING STYLES**

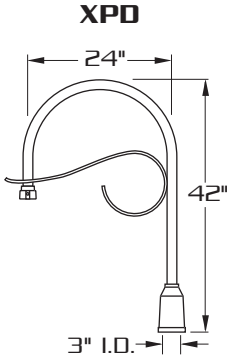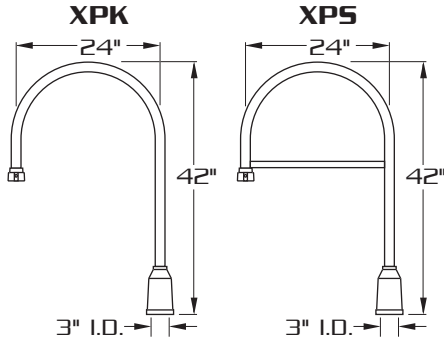

ARMS ARE HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION. FOR ADDITIONAL ARM OPTIONS SEE ARM SECTION.


**WALL MOUNT**

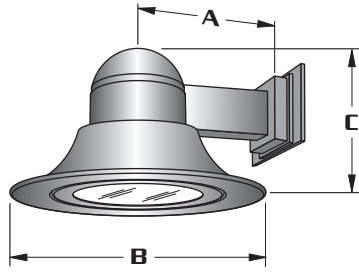

LUM.	A	B	C
DSCP1	14"	22"	13"
DSCP25	18"	28"	17"


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**




**LAMP SIZE:  
50 - 250 WATT**

E.P.A. = 1.10

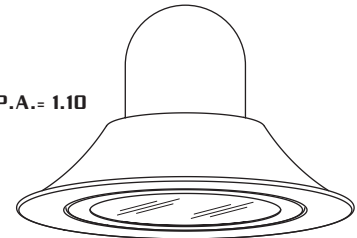

**DSCP25**  
(250 WATT MAX.)

E.P.A. = 0.63



**DSCP1**  
(175 WATT MAX.)

FOUR LIGHT DISTRIBUTIONS AVAILABLE.

OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS LENS.

REFLECTOR IS FIELD ROTATABLE.

**ORDERING INFORMATION**

MODEL NO. : <b>DSCP</b>	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
<b>DSCP</b>	<b>HORIZONTAL LAMP REFLECTORS</b> <input type="checkbox"/> TYPE II <b>HR-II</b> ..... (segmented) <input type="checkbox"/> TYPE III <b>HR-III</b> ..... (segmented) <input type="checkbox"/> TYPE IV (FORWARD THROW) <b>HR-IV</b> ..... (segmented) <input type="checkbox"/> TYPE V <b>HR-V-SQ</b> ..... (segmented) <b>VERTICAL LAMP REFLECTORS</b> <input type="checkbox"/> ASYMMETRIC <b>VR-ASY</b> ..... (segmented) <input type="checkbox"/> TYPE V <b>VR-V-SQ</b> ..... (segmented) VERTICAL LAMP REFLECTOR REQUIRES CONVEX GLASS	<input type="checkbox"/> 250 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 175 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 150 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 100 <input type="checkbox"/> 277 <input type="checkbox"/> 75 <input type="checkbox"/> 480 <input type="checkbox"/> 70 <input type="checkbox"/> MT <input type="checkbox"/> 50  <b>DSCP25</b> USE MOGUL BASE LAMPS  <b>DSCP1</b> USE MEDIUM BASE LAMPS	<input type="checkbox"/> XPK <input type="checkbox"/> XPS <input type="checkbox"/> XPD <input type="checkbox"/> WM ..... <input type="checkbox"/> 1 .....  SEE ARM SECTION FOR ADDITIONAL ARMS	<input type="checkbox"/> DARK BRONZE <b>DBM</b> <input type="checkbox"/> MEDIUM BRONZE <b>MBM</b> <input type="checkbox"/> BLACK <b>BKM</b> <input type="checkbox"/> WHITE <b>WTM</b> <input type="checkbox"/> SILVER <b>SLM</b>  SEE PAGE 3 FOR ADDITIONAL COLORS	<input type="checkbox"/> CONVEX GLASS..... <b>DG</b> <input type="checkbox"/> CLEAR CONVEX POLYCARBONATE DIFFUSER..... <b>LEX</b> <input type="checkbox"/> 3/4" IPS STEM MOUNT AND SWIVEL CANOPY (4'-0" MAX.)..... <b>SM</b> <input type="checkbox"/> CHAIN MOUNTED (4'-0" MAX.)..... <b>CM</b> <input type="checkbox"/> HOUSE SIDE SHIELD..... <b>HS</b> <input type="checkbox"/> QUARTZ RESTRIKE..... <b>QTZ</b> <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V)..... <b>PC+V</b> <input type="checkbox"/> SINGLE FUSE (120V. , 277V)..... <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V. , 240V)..... <b>DF</b>



660 WEST AVENUE O, PALMDALE, CA. 93551  
 (661) 233-2000  
 FAX NO. (661) 233-2001  
[www.usaltg.com](http://www.usaltg.com)