



D S C R B




D5CRB25
[250 W. MAX.]



D5CRB1
[175 WATT MAX.]

E.P.A. **D5CRB25**= 1.28
D5CRB1= 0.95

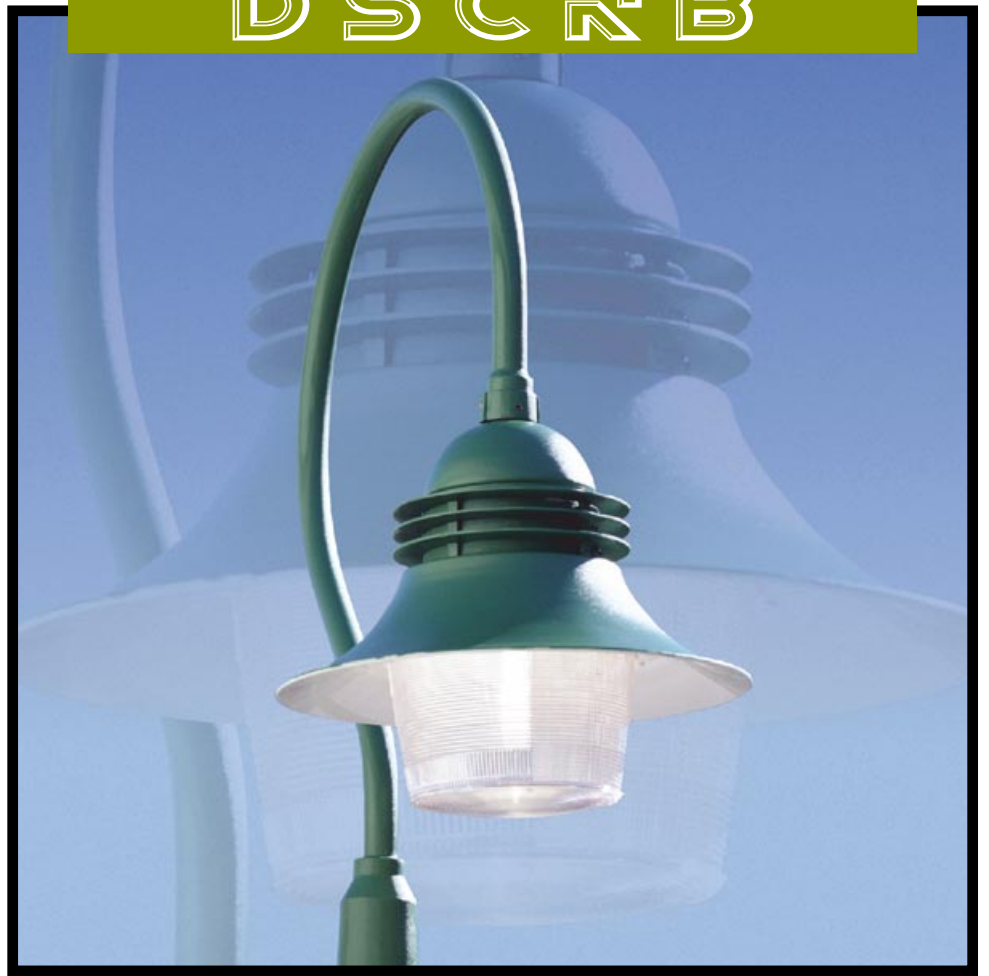

WM



1



2-180



2-90



3-90



3-120



4-90

SPECIFICATIONS

HOUSING: HEAVY WALL ALUMINUM CONSTRUCTION WITH REMOVABLE BALLAST TRAY FOR EASY BALLAST ACCESS.

REFLECTOR: HEAVY WALL ALUMINUM CONSTRUCTION. INSIDE OF REFLECTOR FINISHED WITH HIGH GLOSS WHITE ENAMEL.

OPTICS: CLEAR PRISMATIC POLYCARBONATE REFRACTOR. TYPE V LIGHT DISTRIBUTION.
OPTIONS: TYPE I, II, III, IV LIGHT DISTRIBUTION.

LAMP HOLDER: MEDIUM OR MOGUL BASE PORCELAIN.


LAMP: [BY OTHERS]

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




MOUNTING STYLES

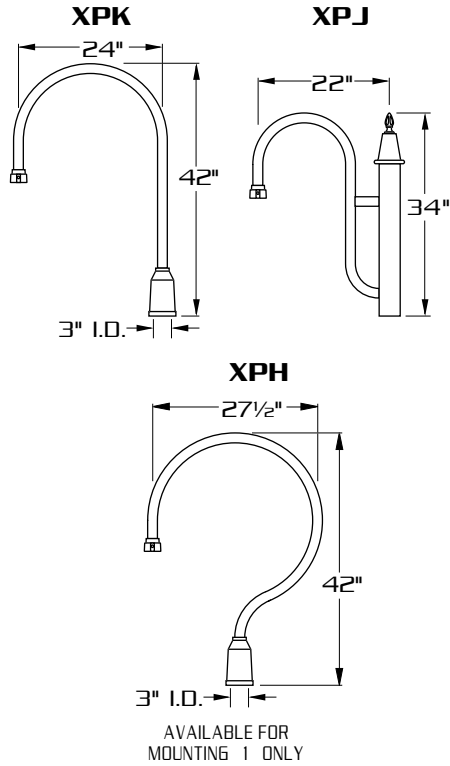


ARMS ARE HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION. FOR ADDITIONAL ARM OPTIONS SEE ARM SECTION.

WALL MOUNT

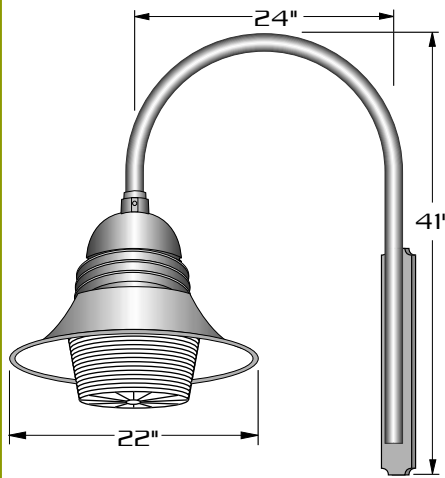


EXTRUDED AND CAST ALUMINUM CONSTRUCTION.

WALL PLATE




**LAMP SIZE:
50 - 250 WATT**

E.P.A.= 1.28

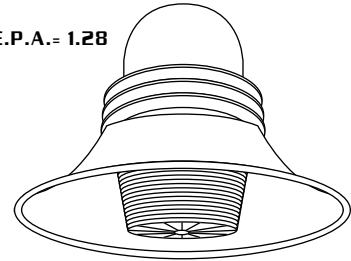

D5CRB25
[250 W. MAX.]

E.P.A.= 0.95



D5CRB1
[175 W. MAX.]

**FIVE LIGHT DISTRIBUTIONS.
ALL ALUMINUM CONSTRUCTION.
INTEGRAL, SELF CONTAINED
BALLAST COMPARTMENT.
THREE MOUNTING STYLES.**

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
D5CRB					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
D S C R B	<input type="checkbox"/> TYPE I I.....	<input type="checkbox"/> 250 <input type="checkbox"/> HPS <input type="checkbox"/> 120	<input type="checkbox"/> XPK <input type="checkbox"/> XPJ	<input type="checkbox"/> DARK BRONZE DBM	<input type="checkbox"/> 3/8" IPS STEM MOUNT AND SWIVEL CANOPY (4'-0" MAX.) SM
	<input type="checkbox"/> TYPE II II.....	<input type="checkbox"/> 175 <input type="checkbox"/> MH <input type="checkbox"/> 208	<input type="checkbox"/> XPH	<input type="checkbox"/> MEDIUM BRONZE MBM	<input type="checkbox"/> CHAIN MOUNTED (4'-0" MAX.) CM
	<input type="checkbox"/> TYPE III III.....	<input type="checkbox"/> 150 <input type="checkbox"/> MV <input type="checkbox"/> 240	<input type="checkbox"/> WM	<input type="checkbox"/> BLACK BKM	<input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180°
	<input type="checkbox"/> TYPE IV (FORWARD THROW) IV.....	<input type="checkbox"/> 100 <input type="checkbox"/> 277	<input type="checkbox"/> 1	<input type="checkbox"/> WHITE WTM	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V
	<input type="checkbox"/> TYPE V V.....	<input type="checkbox"/> 75 <input type="checkbox"/> 480		<input type="checkbox"/> SILVER SLM	<input type="checkbox"/> SINGLE FUSE (120V., 277V) SF
		<input type="checkbox"/> 70 <input type="checkbox"/> MT			<input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF
	<input type="checkbox"/> 50				
	D5CRB1- 175 W. MAX.		SEE ARM SECTION FOR ADDITIONAL ARMS	SEE PAGE 3 FOR ADDITIONAL COLORS	

