



# SAP



**SAP20**  
[400 W. MAX.]



**SAP12**  
[250 W. MAX.]

E.P.A. **SAP20**- 5.49  
**SAP12**- 2.12



WM



1



2-180



2-90



3-90



3-120



4-90

## SPECIFICATIONS

**LUMINAIRE:** ONE PIECE. UNITIZED HEAVY WALL ALUMINUM HOUSING WITH 1/4" CLEAR ACRYLIC LENS.

**OPTICS:** COMPUTER DESIGNED ONE PIECE SYMMETRIC SPECULAR UPPER REFLECTOR. COMBINES WITH CLEAR SPECULAR LOWER DISTRIBUTING REFLECTOR TO PRODUCE WIDE EFFICIENT, LIGHT DISTRIBUTION.

**OPTION:** ASYMMETRIC DISTRIBUTION. . . . . ASY


**MOUNTING:** RUGGED TWO PIECE CAST ALUMINUM FITTER HAS ATTACHED INTERNAL SLIP FITTER WHICH SLIPS INSIDE POLE AND IS FIXED TO POLE WITH FOUR STAINLESS STEEL SET SCREWS.

**LAMP HOLDER:** MEDIUM OR MOGUL BASE PORCELAIN.

**LAMP:** [BY OTHERS]


**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




660 WEST AVENUE O, PALMDALE, CA. 93551  
(661) 233-2000  
FAX NO. (661) 233-2001  
www.usaltg.com

**MOUNTING STYLES**



PTA




PTB

**PTB27**-TO FIT OVER 2 7/8" O.D. TENON.

**PTB23**-TO FIT OVER 2 3/8" O.D. TENON.


**WALL MOUNT**

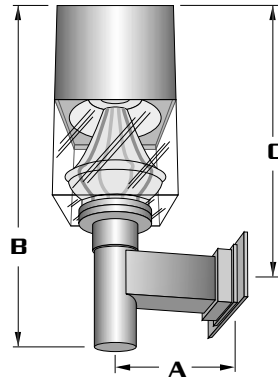


LUM.	A	B	C
SAP20	18"	44 1/2"	37 1/2"
SAP12	12"	32 1/2"	25 1/2"

EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**



**LAMP SIZE:  
100 - 400 WATT**



E.P.A.= 5.49

**SAP20**  
[400 W. MAX.]



E.P.A.= 2.12

**SAP12**  
[250 W. MAX.]

**HEAVY WALL ALUMINUM HOUSING.**

**SYMMETRIC OR ASYMMETRIC LIGHT DISTRIBUTION.**

**ORDERING INFORMATION**

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
<b>SAP</b>					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
<b>SAP</b>	<input type="checkbox"/> SYMMETRIC SYM	<input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 175 <input type="checkbox"/> 277 <input type="checkbox"/> 150 <input type="checkbox"/> 480 <input type="checkbox"/> 100 <input type="checkbox"/> MT	<input type="checkbox"/> PTA  <input type="checkbox"/> PTB23 (TO FIT 2 3/8" O.D.)  <input type="checkbox"/> PTB27 (TO FIT 2 7/8" O.D.)  WALL MOUNT <input type="checkbox"/> WM .....	<input type="checkbox"/> DARK BRONZE DBM <input type="checkbox"/> MEDIUM BRONZE MBM <input type="checkbox"/> BLACK BKM <input type="checkbox"/> WHITE WTM <input type="checkbox"/> SILVER SLM	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER ..... LEX <input type="checkbox"/> HOUSE SIDE SHIELD 90° ..... HS 90° 135° ..... HS 135° 180° ..... HS 180°  <input type="checkbox"/> SINGLE FUSE (120V., 277V) ..... SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... DF
	<input type="checkbox"/> ASYMMETRIC ASY	<b>SAP12</b> - 250 W. MAX.		SEE PAGE 3 FOR ADDITIONAL COLORS	

