


# B D A R S

[75 WATT MAX.]



FLAT RING

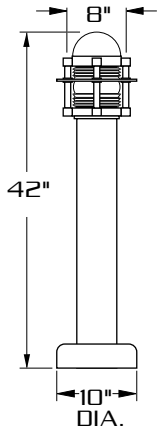

REFLECTOR



VERTICAL RIBS

## SPECIFICATIONS

**HOUSING:** DURABLE, CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION. FOUR HEAVY WALL EXTRUDED VERTICAL RIBS AT 90° SURROUND OPTICAL TRAIN.

**OPTICAL TRAIN:** **(FR)** CLEAR PRISMATIC POLYCARBONATE REFRACTOR PROVIDES SYMMETRIC LIGHT DISTRIBUTION. DECORATIVE CAST ALUMINUM RING ENTIRELY SURROUNDS OPTICAL CHAMBER.

**OPTIONS:**

**(AR)** DECORATIVE ANGLED SPUN ALUMINUM REFLECTOR ENTIRELY SURROUNDS OPTICAL CHAMBER.

**(VR)** CLEAR PRISMATIC POLYCARBONATE REFRACTOR PROVIDES SYMMETRIC LIGHT DISTRIBUTION.

**GASKETING:** CLOSED CELL SILICONE.

**LAMP HOLDER:** MEDIUM BASE PORCELAIN.

**LAMP:** [BY OTHERS]

**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

**SHAFT:** 5" DIA. EXTRUDED FROM 6063 ALLOY ALUMINUM.


**ANCHORAGE:** [4] 3/8"X10" FULLY GALVANIZED ANCHOR BOLTS EACH SUPPLIED WITH TWO NUTS AND TWO WASHERS.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.





**OPTICS**


STANDARD:



OPTIONS:




**WALL MOUNT  
STYLE**

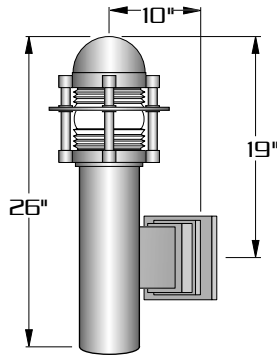


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**



**LAMP SIZE:  
13 - 75 WATT**

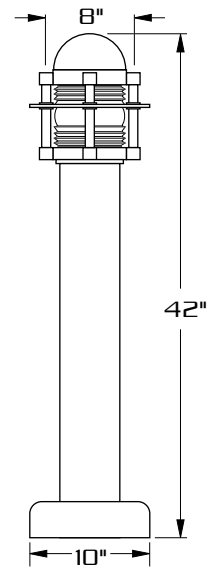

EXTRUDED ALUMINUM CONSTRUCTION.

INTERGRAL CAST ALUMINUM BALLAST HOUSING.

**ORDERING INFORMATION**

| MODEL NO.:                       | OPTICS   | WATTAGE TYPE VOLTAGE  | MOUNTING   | FINISH   | OPTIONS   |
|----------------------------------|--|---|--|--|---|
| <b>BDAR5</b>                     |  |   |  |  |   |
| MODEL NO.:                       | OPTICS   | LAMP  | MOUNTING   | FINISH   | OPTIONS   |
| <b>B<br/>D<br/>A<br/>R<br/>5</b> | STANDARD:<br><input type="checkbox"/> FLAT RING<br><b>FR</b> | WATTAGE TYPE VOLTAGE<br><input type="checkbox"/> 75 <input type="checkbox"/> HPS <input type="checkbox"/> 120<br><input type="checkbox"/> 70 <input type="checkbox"/> MH <input type="checkbox"/> 277<br><input type="checkbox"/> 50 <input type="checkbox"/> MV <input type="checkbox"/> MT<br><input type="checkbox"/> 35 <input type="checkbox"/> PL<br><input type="checkbox"/> 26 <input type="checkbox"/> INC<br><input type="checkbox"/> 18<br><input type="checkbox"/> 13 | GROUND INSTALLATION<br><br>7 1/2" DIA BOLT CIRCLE<br><br>10" DIA.<br><br>ANCHOR BOLT<br>(4) 3/8" X 10" | <input type="checkbox"/> DARK BRONZE <b>DBM</b><br><input type="checkbox"/> MEDIUM BRONZE <b>MBM</b><br><input type="checkbox"/> BLACK <b>BKM</b><br><input type="checkbox"/> WHITE <b>WTM</b><br><input type="checkbox"/> SILVER <b>SLM</b> | <input type="checkbox"/> HOUSE SIDE SHIELD<br>90° ..... <b>HS 90°</b><br>135° ..... <b>HS 135°</b><br>180° ..... <b>HS 180°</b><br><input type="checkbox"/> DUPLEX RECEPTACLE..... <b>DUP</b><br><input type="checkbox"/> GROUND FAULT RECEPTACLE..... <b>GFI</b><br><input type="checkbox"/> SINGLE FUSE (120V., 277V) ..... <b>SF</b><br><input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... <b>DF</b><br><input type="checkbox"/> WALL MOUNT..... <b>WM</b><br><br><b>OPTIONAL HEIGHTS:</b><br><input type="checkbox"/> 30"<br><input type="checkbox"/> 36" |
|                                  |  | OPTIONS:<br><input type="checkbox"/> REFLECTOR <b>AR</b><br><input type="checkbox"/> VERTICAL RIBS <b>VR</b>  |  | SEE PAGE 3 FOR ADDITIONAL COLORS   |   |

